
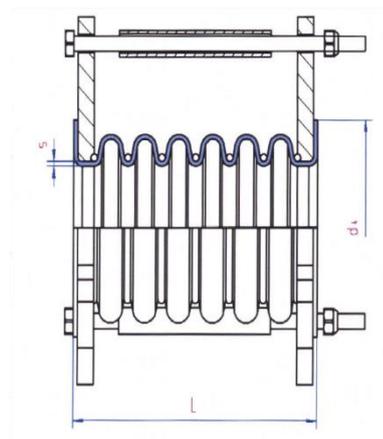


## MB | Xpansion PTFE Compensator 6 convolutions - Datasheet

To ensure a perfect installation, our compensators are equipped with 3 limiting screws. They prevent the bellows from being overstretched during operation. Flanges with 2 or without limiter-bolts are available.

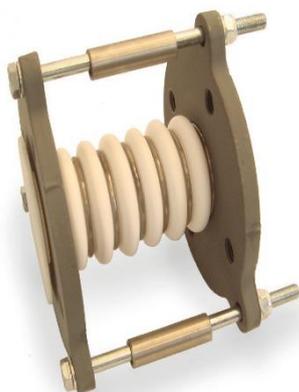

### Technical Specifications

<b>Flange material:</b>	Flanges available in carbon steel, stainless steel and/or special steel
<b>Connection options:</b>	ANSI and DIN connection
<b>Lining options:</b>	PTFE virgin white and PTFE antistatic black
<b>Limited Screws:</b>	Flanges with 2 or without limiter-bolts are available
<b>Holes:</b>	Up to DN65 flange with thread. From DN80 with drill holes (customized possible)

DN	Install length L (mm)	Extension Axial ± (mm)	Shifting Lateral ± (mm)	Deviation Angular +/-	Reicedface Dia. (mm)	Wallthicknes s (mm)	Wave's
25	115	20	10	13	68	3,0	6
32	125				78	3,0	6
40	132	30	14	16	88	3,0	6
50	145				102	3,5	6
65	168	40	18	20	122	3,75	6
80	185				138	4,0	6
100	192	50	22	18	158	4,5	6
125	200				188	4,5	6
150	210				212	5,0	6

#### MB Plastics

Website: [www.mbplastics.nl](http://www.mbplastics.nl)  
 Telephone: +085 020 1666  
 Email: [Sales@mbplastics.nl](mailto:Sales@mbplastics.nl)